



Th. WORTELBOER B.V.

SLUISWEG 9
NL - 6582 AG HEUMEN
HOLLAND
PHONE +31 24 358 6514


www.wortelboerbv.com

E-mail : info@wortelboerbv.com

TUBOGRAT DEBURRING MACHINES **range Ø 2 - 77 mm.**



The TUBOGRAT pipe end deburring machine meets the highest quality requirements in design and finish.
It is perfect for series production and flexible individual production.

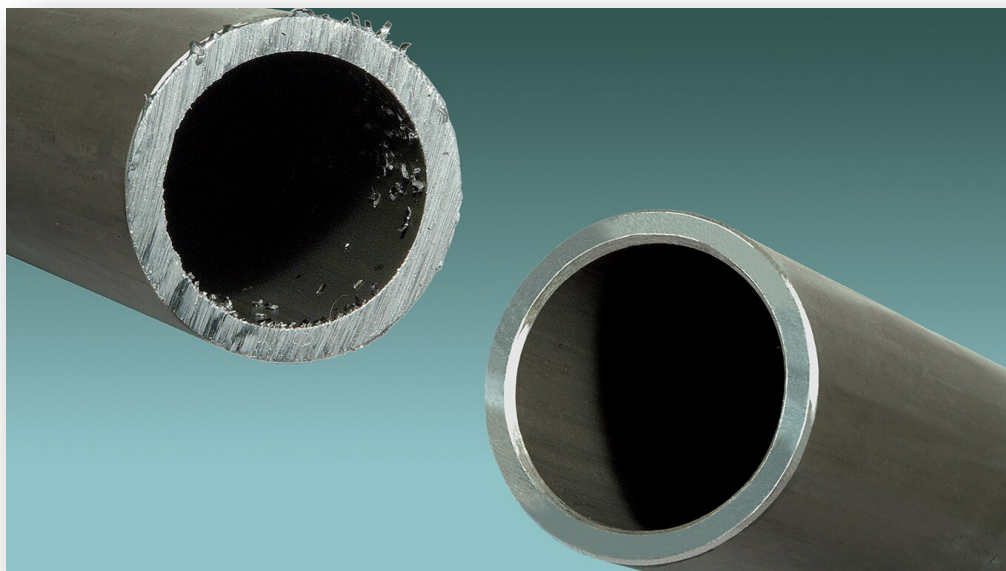

Technical specifications Tubograt:

Machine type	TUBOGRAT 48	TUBOGRAT 60
Pipediameters	Ø 6 — 48 mm.	Ø 20 — 60 mm.
Rotation speed (2 speeds)	140 min ¹ / 280 min ¹ .	140 min ¹ / 280 min ¹ .
Sizes	430 x 240 x 320 mm.	510 x 280 x 380 mm.
Weight	25 Kgs.	35 Kgs.
Power	0,12 kW.	0,73 kW.



Machine type	TUBOGRAT K60	TUBOGRAT K77
Pipediameters	2–17 mm. / 3–41 mm. / 21–57 mm.	40–77 mm.
Rotation speed (2 speeds)	140 min ¹ / 280 min ¹ .	140 min ¹ / 280 min ¹ .
Sizes	510 x 280 x 485 mm.	510 x 280 x 495 mm.
Weight	37 Kgs.	37 Kgs.
Power	0,37 kW.	0,37 kW.